

myBLOCK Digital Dry Baths



- + Digital temperature control set and walk away
- + Hinged lid improves temperature uniformity and conserves energy
- + External temperature probe (optional) displays and controls actual sample temperature
- + Available with Quick-Flip™ universal blocks for microtubes (0.2 to 2.0ml), PCR strips & PCR plates

BSH5001-1B-E/BSH5002-2B-E
myBlock I/II™. digital dry bath

BioMixer™
and
MiniMixer™



B3D1320-E
BioMixer™ 3D
Nutating Shaker

B3D1020-E
MiniMixer™ 3D
Nutating Shaker



- + Nutating motion for thorough, uniform mixing
- + Dimpled mat, perfect for blood and centrifuge tubes
- + Stacking platforms and flat mats available
- + Incubator & cold room safe

Technical Data:

Temperature Range:	Ambient +5 to 105°C
Temp. Accuracy / Uniformity:	± 0.3°C / ± 0.1°C
Temperature Increments:	0.1°C
Timer:	1 min to 99 hr 59 min.
Dimensions (w x d x h):	
Single:	7 x 10 x 5 in. / 18 x 25 x 13 cm
Dual:	6.3 x 14 x 5 in. / 16 x 36.5 x 13 cm
Weight:	10 lbs. / 4.5 kg
Electrical:	115V or 230V, 50-60Hz
Warranty:	2 years


Technical Data

Speed:	24 rpm*
Tilt Angle:	+/- 20 degrees
Platform Size:	
MiniMixer:	10.5x7.5 in. / 27x19 cm
BioMixer:	12x12 in. / 30x30 cm
Load Capacity:	1.6 kg / 3.5 lbs.
Operating Temp. Range:	+4°C to +65°C
Dimensions (WxDxH):	
MiniMixer:	10.5 x 7.5 x 8 in.
BioMixer:	12 x 12 x 8.3 in.
Weight:	2.0 kg / 4.4 lb
Warranty:	2 Years
Electrical:	115V AC, 60 Hz, 0.4A 230V AC, 50 Hz, 0.2A

*Speed of 230V model is 20 rpm

Mini BlotBoy™
and
BlotBoy™

Benchmark 3-Dimensional Rockers

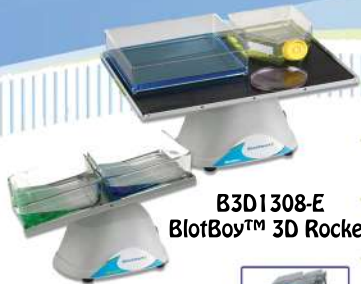

B3D1008-E
Mini BlotBoy™ 3D Rocker



Optimized speed & tilt for gel blotting, washing & staining

- + Tri-directional motion for thorough, gentle mixing
- + Stacking platforms available
- + Incubator & cold room safe

BenchRocker™ 2D

Benchmark Variable Speed Rockers



BR2000-E
BenchRocker 2D Rocker
with flat mat

- + Multi-purpose - many applications
- + Two or three dimensional motion
- + Adjustable speed and tilt angle
- + Dual platform option expands workspace
- + Safe for incubator/cold room use

Technical Data

Speed:	12 rpm*
Tilt Angle:	+/- 8 degrees
Platform Size:	
Mini BlotBoy:	10.5x7.5 in. / 27x19 cm
BlotBoy:	12x12 in. / 30x30 cm
Load Capacity:	1.6 kg / 3.5 lbs.
Operating Temp. Range:	+4°C to +65°C
Dimensions (WxDxH):	
Mini BlotBoy:	10.5 x 7.5 x 8 in.
BlotBoy:	12 x 12 x 8.3 in.
Weight:	2.0 kg / 4.4 lb
Warranty:	2 Years
Electrical:	115V AC, 60 Hz, 0.4A 230V AC, 50 Hz, 0.2A

*Speed of 230V model is 10 rpm

Technical Data

Speed:	Variable, 2 to 30 rpm
Tilt Angle:	Variable, 0 to 30°
Platform Size (2D):	35 x 30 cm / 14 x 12 in.
Platform Size (3D):	30 x 30 cm / 12 x 12 in.
Load Capacity:	2.0 kg / 4.4 lbs.
Operating Temp. Range:	+4°C to +45°C
Dimensions (WxDxH):	
2D:	35 x 30 x 20 cm
3D:	14 x 12 x 8 in.
Weight:	3.4 kg / 7.5 lb
Warranty:	2 Years
Electrical:	115V AC, 60 Hz, 0.3A 230V AC, 50 Hz, 0.15A